US 20060032553A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2006/0032553 A1

Williams (43) Pub. Date: Feb. 16, 2006

(54) MULTI-FUNCTION ADJUSTABLE ROUTER BASE

(76) Inventor: Gary E. Williams, Blue Springs, MO (US)

Correspondence Address:
HOVEY WILLIAMS LLP
2405 GRAND BLVD., SUITE 400
KANSAS CITY, MO 64108 (US)

(21) Appl. No.: 11/201,548

(22) Filed: Aug. 11, 2005

Related U.S. Application Data

(60) Provisional application No. 60/601,560, filed on Aug. 13, 2004.

Publication Classification

(51) Int. Cl.
B27C 1/00 (2006.01)

(52) U.S. Cl. 144/154.5

(57) ABSTRACT

An adjustable router base suitable for attachment to conventional manual routers. In one configuration, the router base permits easy and accurate adjustment of the router bit relative to a variety of fixed guiding edges (e.g., the edge of a workpiece or a straight edge) or points (e.g., the pivot point of an arcuate cut). In another configuration, the router base permits the router to be used in a conventional manner to cut an edge on a workpiece.

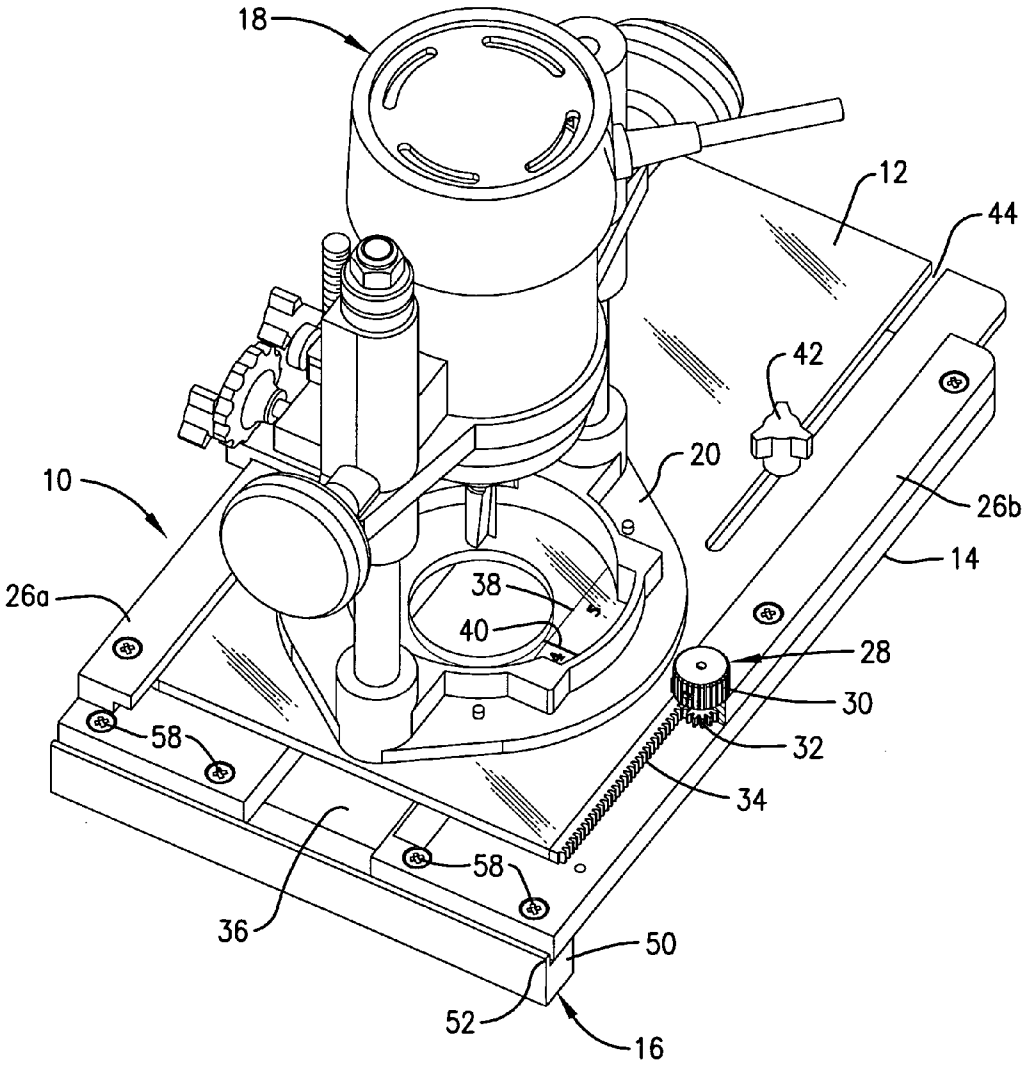

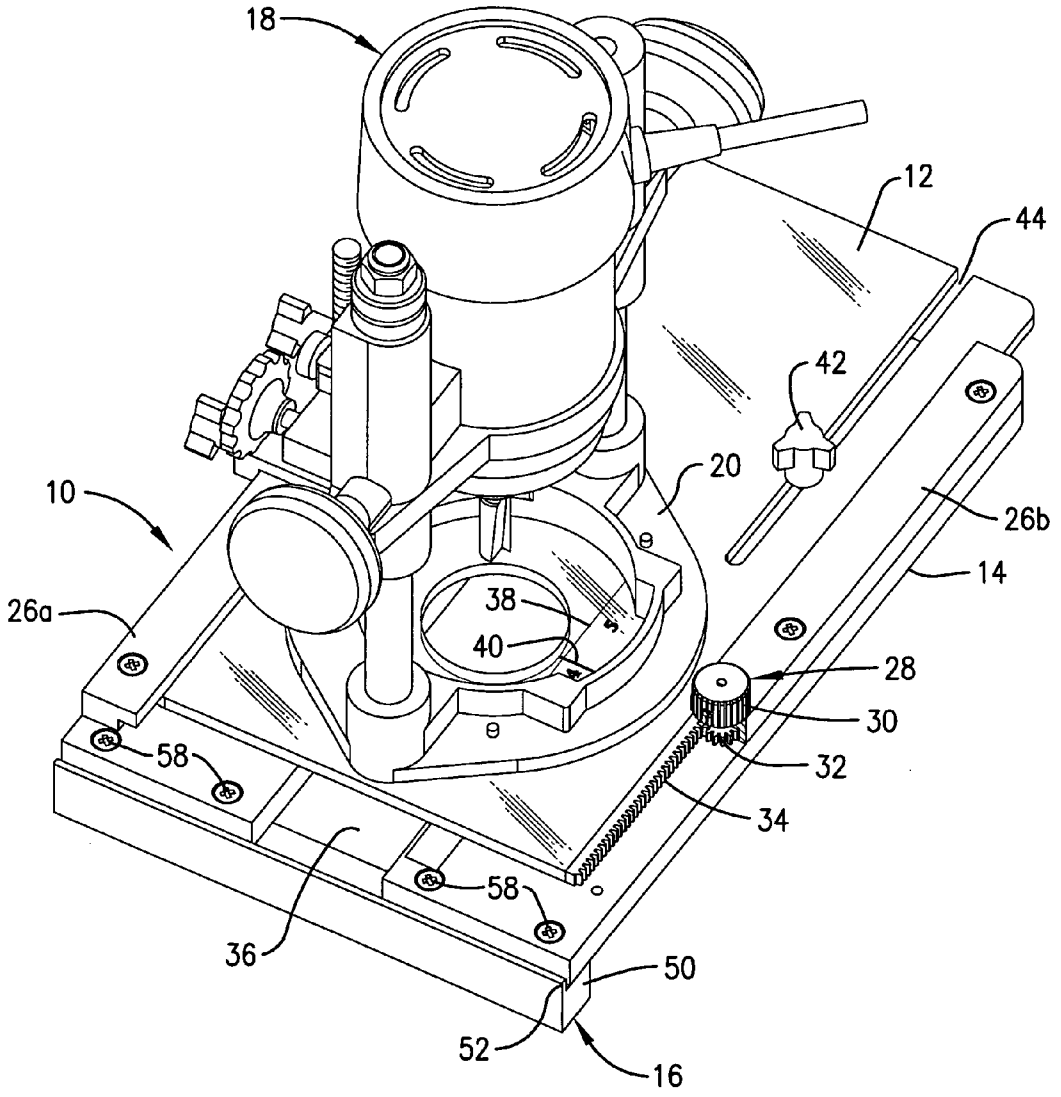

Fig. 1.

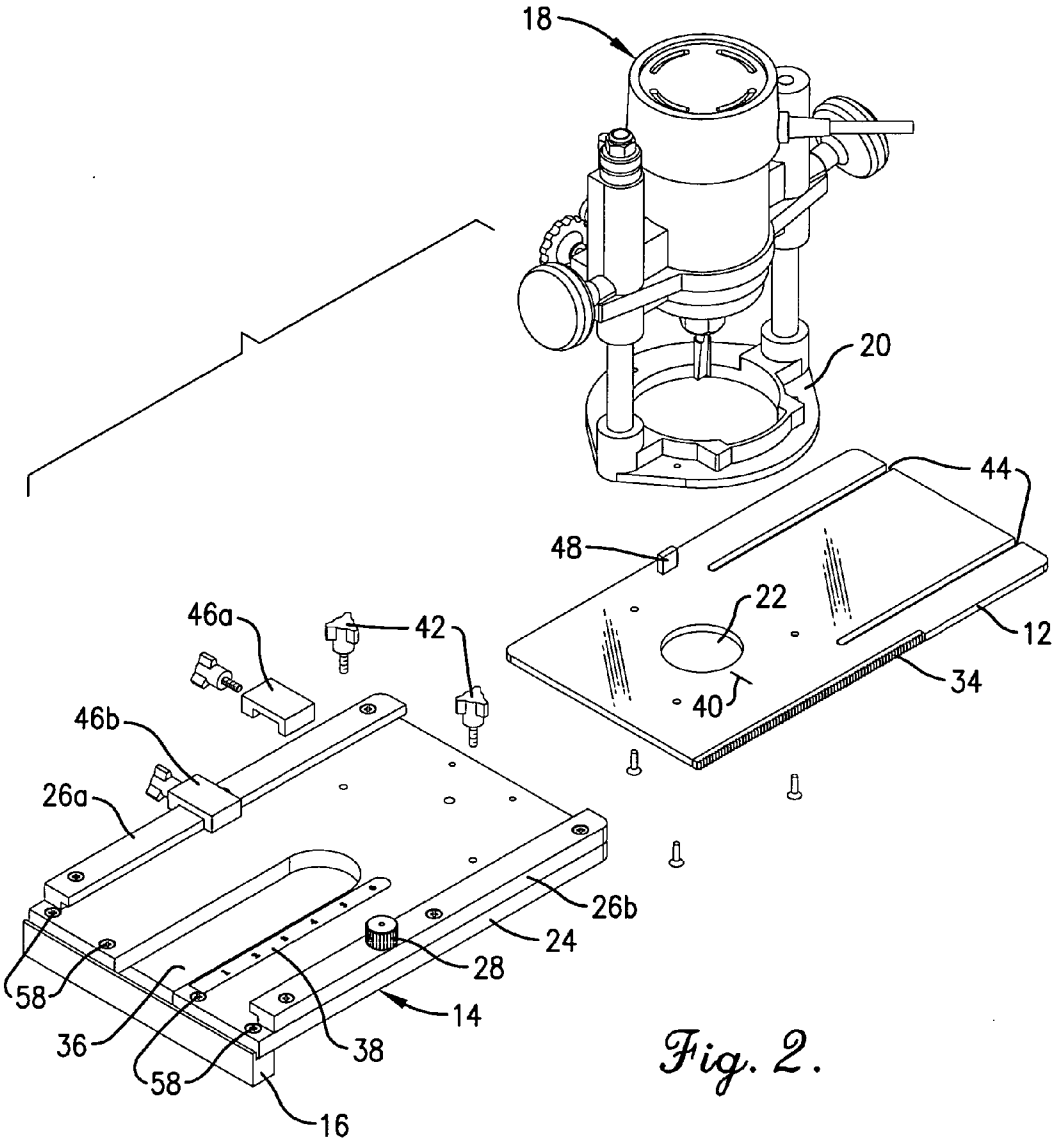

Fig. 2.

Fig. 3.

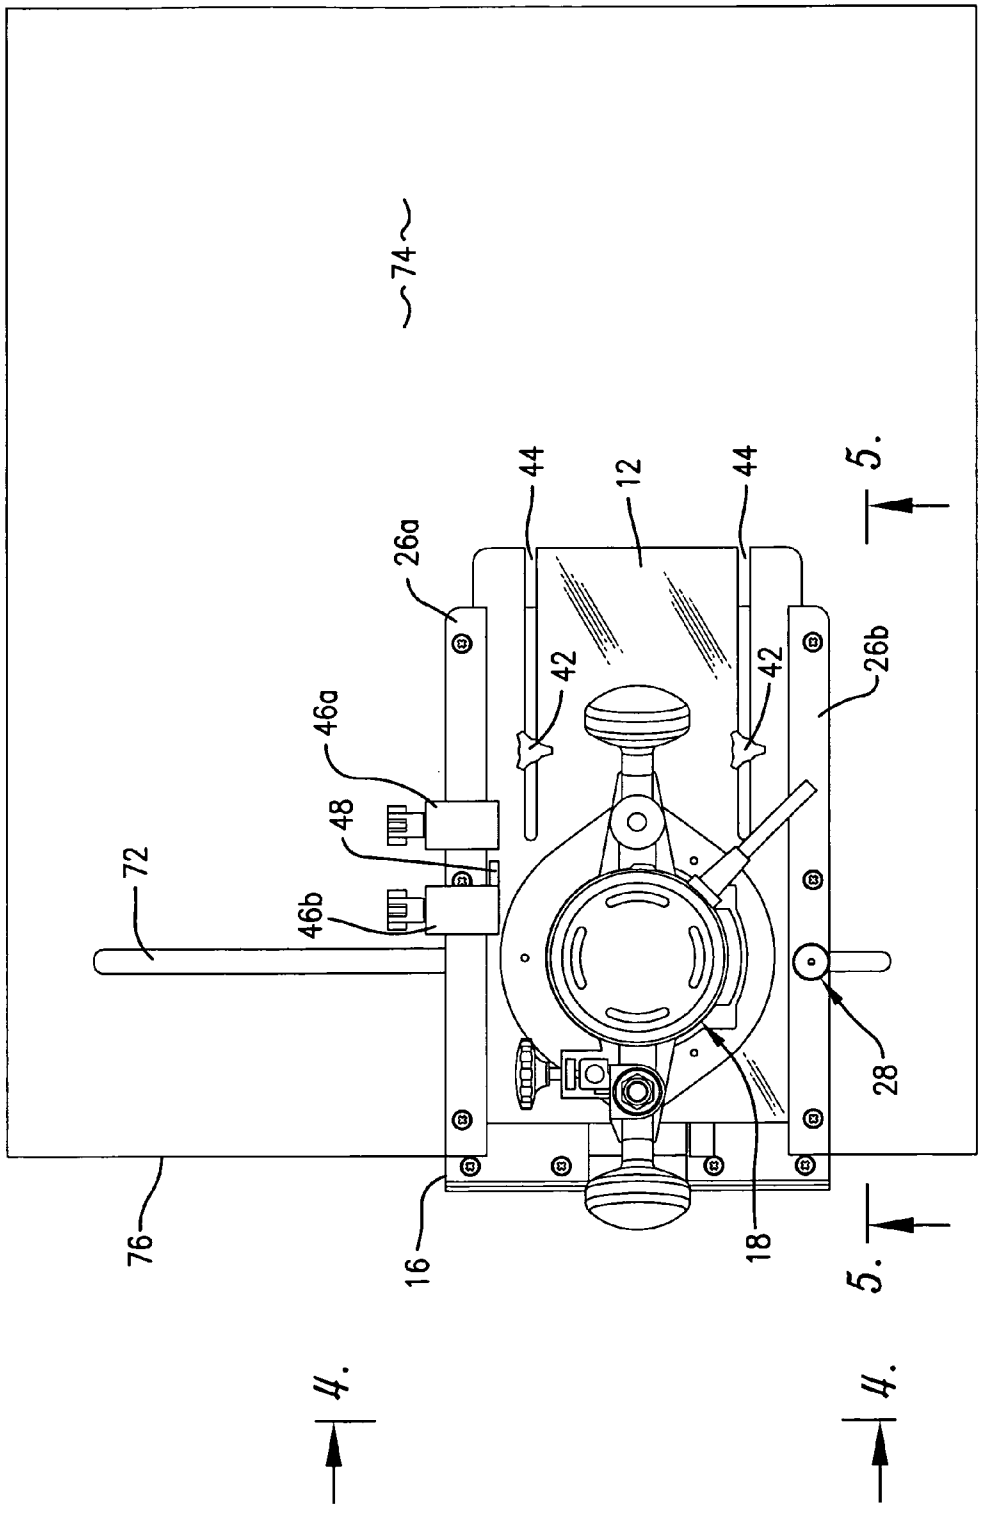

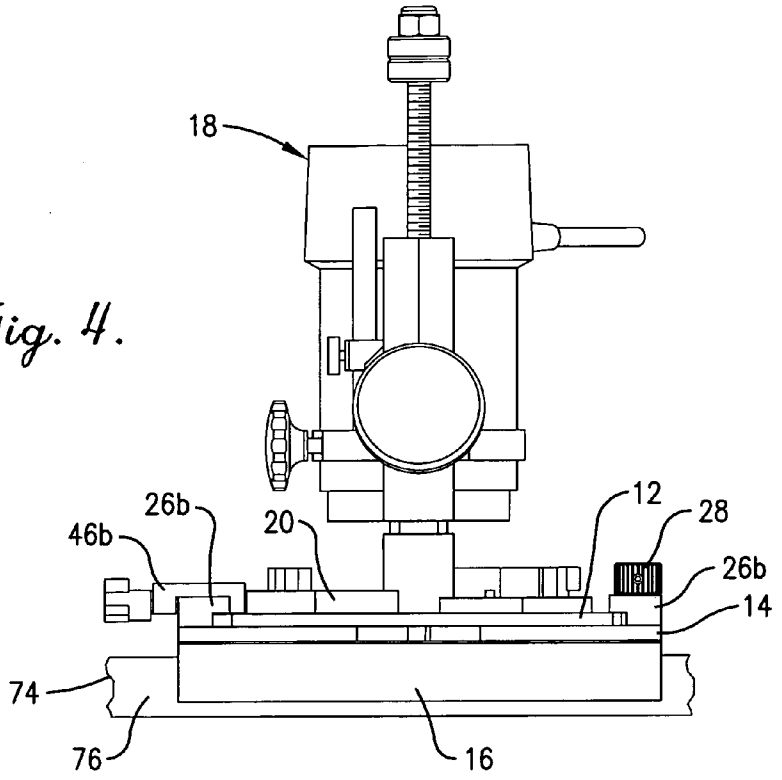
18
26b
46b
20
12
28
26b
14
74
76
16

Fig. 4.

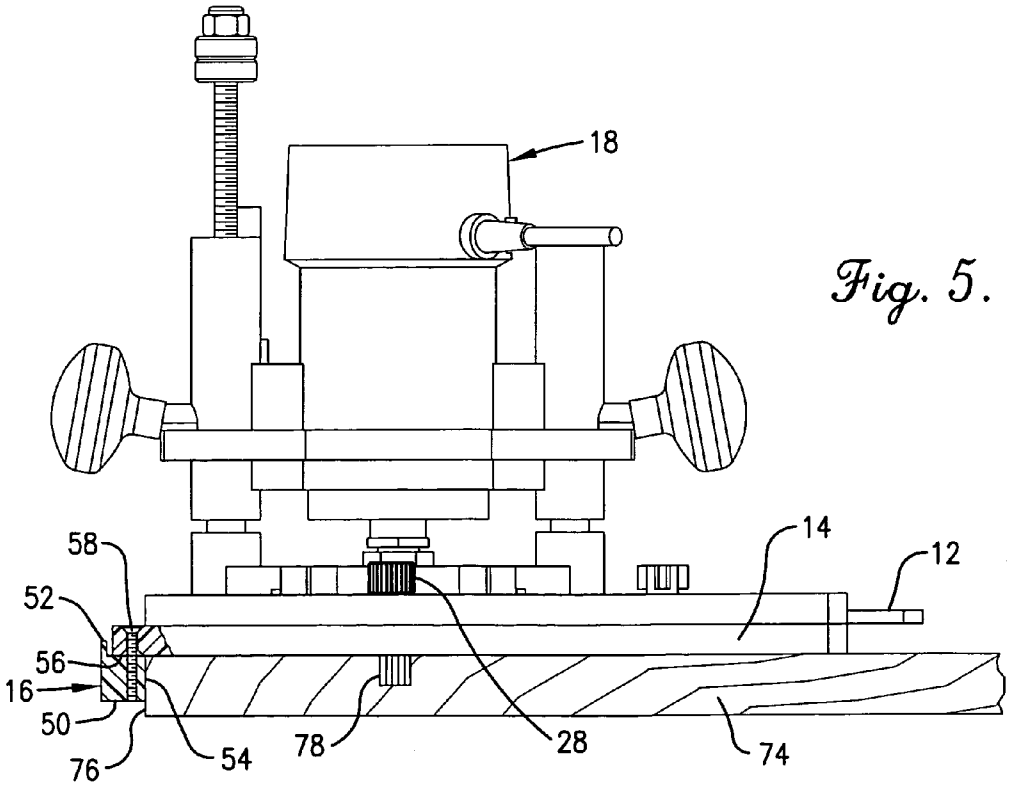
18
58
52
56
16
50
76
54
78
28
14
12
74

Fig. 5.

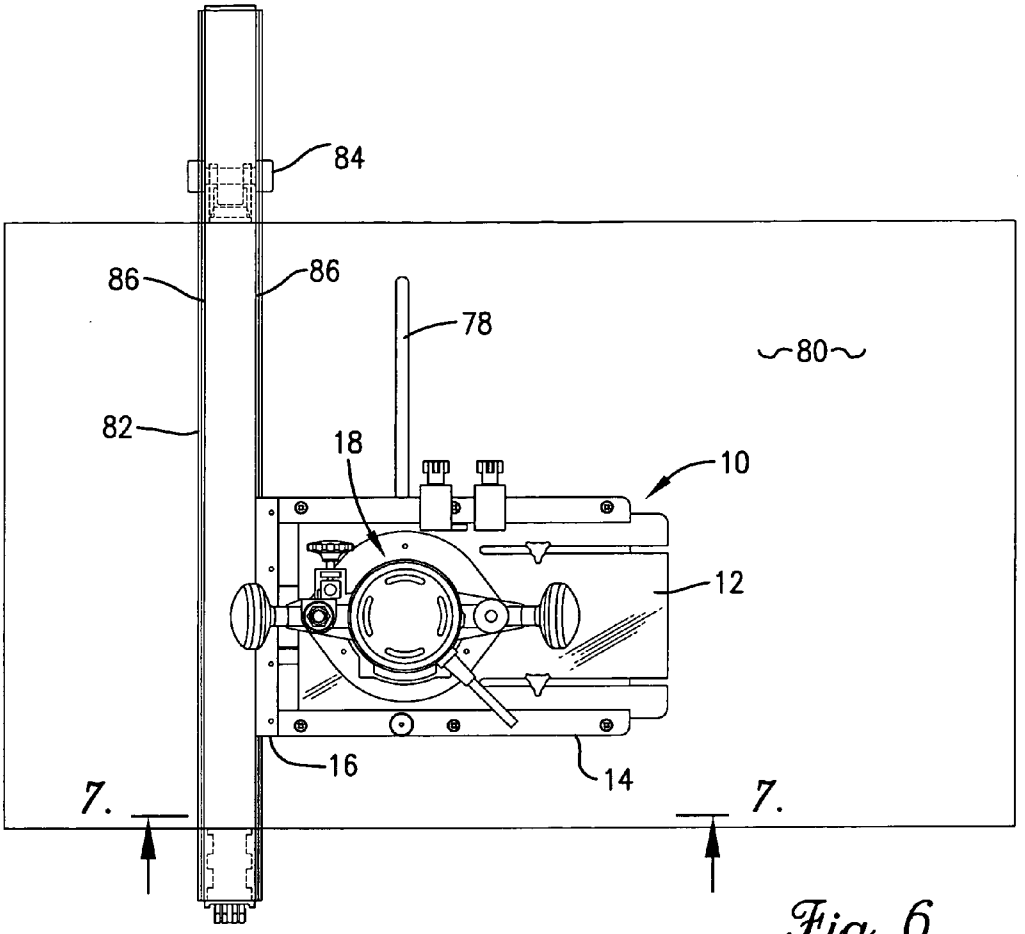
84
86
86
78
80
82
18
10
12
16
14
7.
7.

Fig. 6.

Fig. 7.

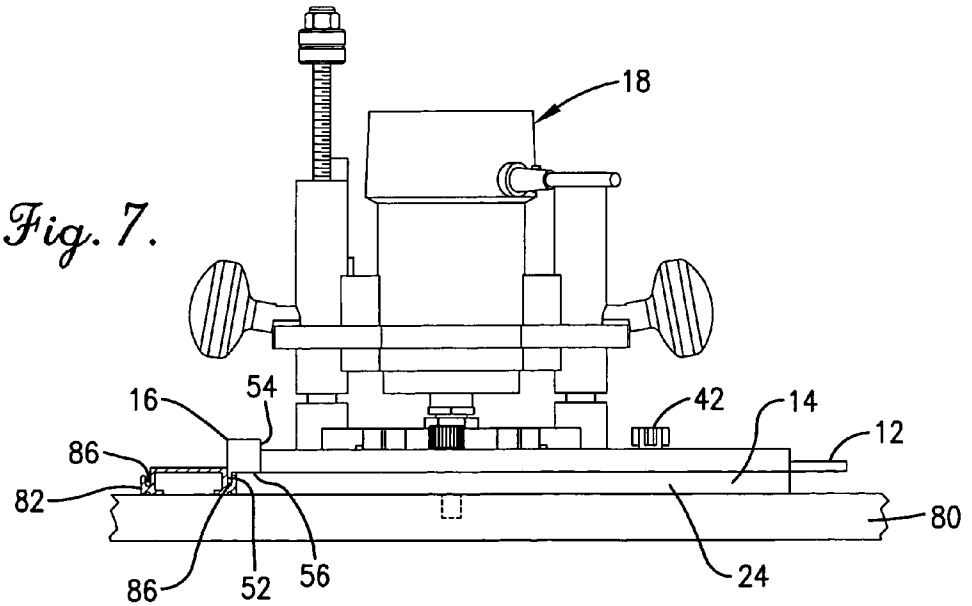
18
16
54
42
14
12
86
82
80
86
52
56
24

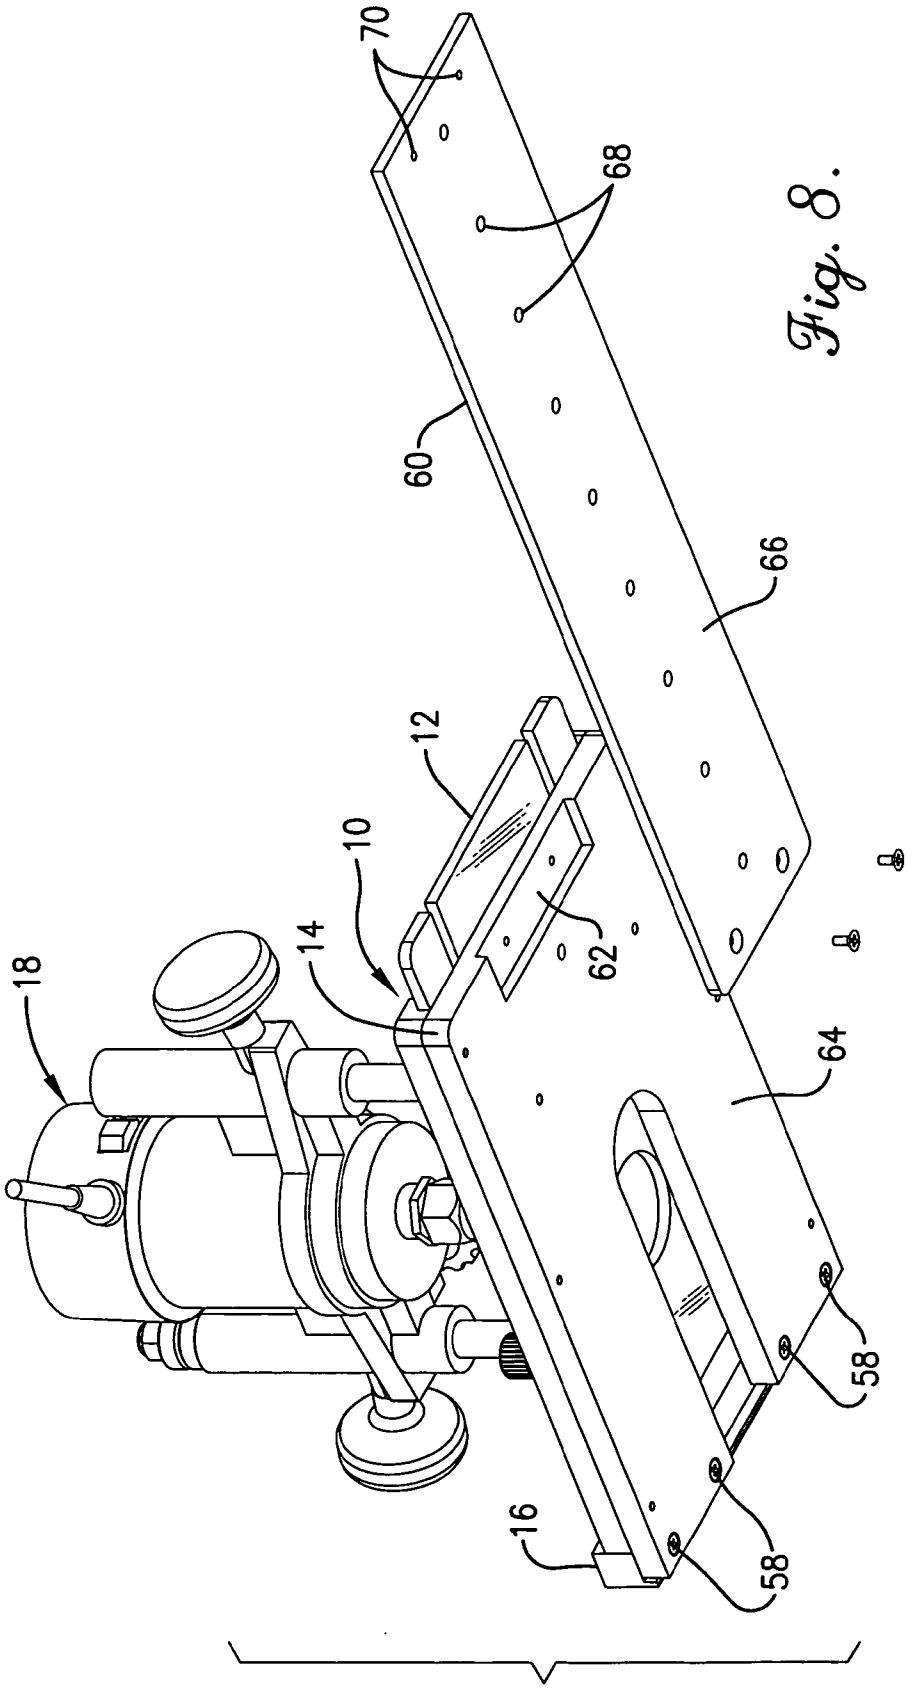

Fig. 8.

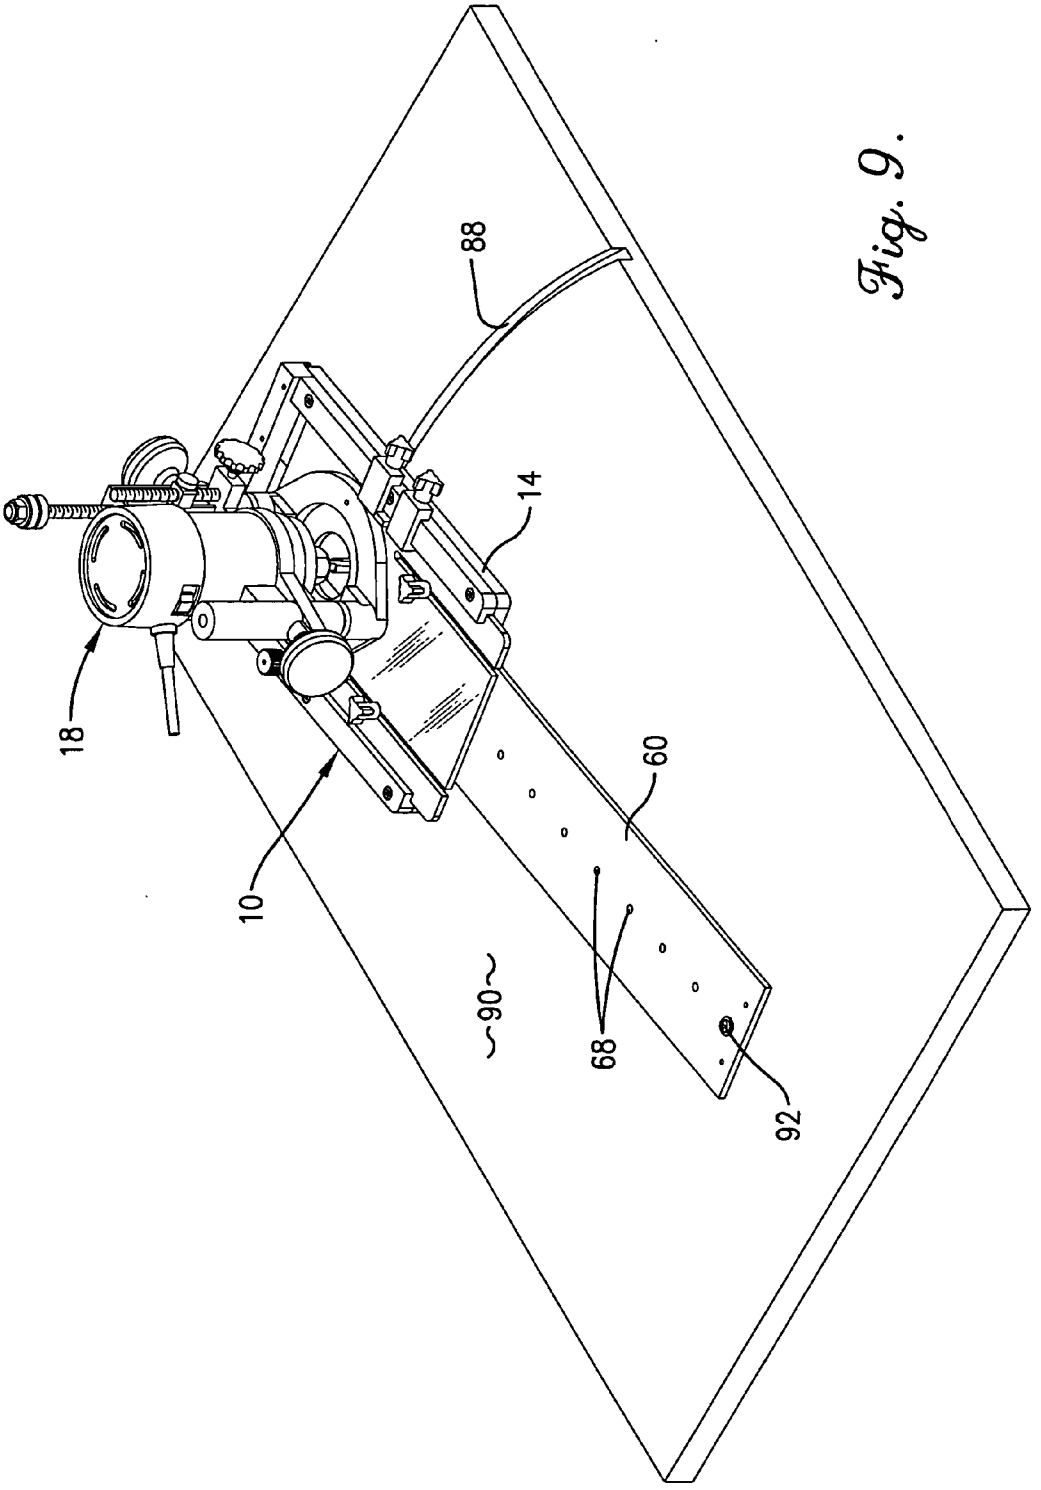

Fig. 9.

MULTI-FUNCTION ADJUSTABLE ROUTER BASE

RELATED APPLICATIONS

[0001] This application claims the priority of Provisional Patent Application Ser. No. 60/601,560, filed Aug. 13, 2004, entitled MULTI-FUNCTION ADJUSTABLE ROUTER BASE, which is hereby incorporated by reference herein.

BACKGROUND

[0002] 1. Field of the Invention

[0003] The present invention relates generally to guide attachments for manual routers used in woodworking. More particularly, the present invention concerns an improved router base for use with a router during various cutting operations.

[0004] 2. Description of the Prior Art

[0005] A router can be a very versatile woodworking tool, in that it can perform many functions. A router having the appropriate bits and attachments can contour pieces of wood, machine out grooves and other decorative features in the surface of wood, and so on. Many router attachments are available from either a router manufacturer or other tool makers which can be mounted to the router to perform these various functions. For example, a base can be provided that has an edge guide in order to guide a router along a path perpendicular to the edge of a workpiece while maintaining a consistent distance from the edge of the workpiece to the groove created by the router. Another attachment can be provided that enables the router to move in a radial path in order to create consistent curvilinear grooves in a workpiece. Additionally, another attachment can be obtained to guide a router along the path of a straight edge in order to create a straight groove in a workpiece when the desired distance from the edge of the work piece to the groove is too great to span using the above mentioned edge guide.

[0006] Although each of these tools may be provided by different manufacturers or tool makers, each requires the purchase of the separate attachments individually. Thus, it is desirable to have a single attachment which can perform all of these functions in order to minimize the cost spent on router accessories and the complexity of mounting, removing, and remounting different accessories to the router.

OBJECTS AND SUMMARY OF THE INVENTION

[0007] Accordingly, it is an object of the present invention to provide a router accessory that has an edge guide in order to guide a router along a path perpendicular to the edge of a workpiece while maintaining a consistent distance from the edge of the workpiece to the groove created by the router.

[0008] A further object of the present invention is to provide a router accessory that guides a router along the path of a straight edge in order to create a straight groove in a workpiece.

[0009] A still further object of the present invention is to provide a router accessory that enables a router to move in a radial path in order to create consistent curvilinear grooves in a workpiece.

[0010] In one embodiment of the present invention there is provided an adjustable router base comprising a normally-lower member, a normally upper member, and an edge guide. The normally-lower member presents a substantially planar lower surface. The normally-upper member is coupled to the normally-lower member and shiftable relative to the normally-lower member. The edge guide is coupled to the normally-lower member and shiftable between a down position and an up position. At least a portion of the edge guide extends below the substantially planar lower surface when in the down position. The edge guide is positioned entirely above the substantially planar lower surface when in the up position.

[0011] In another embodiment of the present invention there is provided an adjustable router base suitable for use in conjunction with a router and a straight edge, where the straight edge has an elongated slot formed therein. The adjustable router base comprises a normally-lower member, a normally upper member, and a protrusion. The normally-lower member presents a substantially planar lower surface. The normally-upper member is configured for rigid attachment to the router. The normally-upper member is shiftably coupled to the normally-lower member. The protrusion is fixed relative to the normally-lower member and extends in a generally downward direction. The protrusion is configured for receipt in the elongated slot of the straight edge so as to permit travel of the protrusion through the elongated slot in the direction of elongation of the slot, while inhibiting shifting of the protrusion in the slot in a direction perpendicular to the direction of elongation of the slot.

[0012] In a further embodiment of the present invention there is provided a method of operating a router coupled to an adjustable router base. The adjustable router base includes a normally-lower member, a normally-upper member, and an edge guide coupled to the normally-lower member. The router is rigidly coupled to the normally-upper member. The operating method includes the following steps: (a) placing at least a portion of the guide member in contact with a guiding edge; (b) using the router to make an elongated first cut in a workpiece while maintaining contact between the guide member and the guiding edge; (c) shifting the normally-upper member relative to the normally-lower member; (d) using the router to make an elongated second cut in the workpiece while maintaining contact between the guide member and the guiding edge, where the first and second cuts are located different distances from the guiding edge; (e) decoupling the normally-upper member from the normally-lower member; and (f) while the normally-upper member is decoupled from the normally-lower member, using the router to make a third cut in the same workpiece or a different workpiece.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Embodiments of the present invention are described herein with reference to the following drawing figures wherein:

[0014] **FIG. 1** is an isometric view of a router coupled to an adjustable router base;

[0015] **FIG. 2** is an assembly view of the router and adjustable router base;

[0016] **FIG. 3** is a top view of the router and adjustable router base being used to cut a dado in a workpiece, particularly illustrating the router base being guided by an edge of the workpiece;

[0017] **FIG. 4** is a front view of the router, adjustable router base, and workpiece indicated by lines **4-4** in **FIG. 3**, particularly illustrating the edge guide of the router base contacting a guiding edge of the workpiece;

[0018] **FIG. 5** is a partially cut-away side view of the router, adjustable router base, and workpiece indicated by lines **5-5** in **FIG. 3**, where the cut-away portion illustrates the manner in which the edge guide of the router base is coupled to a lower member of the router base in a down position with a protrusion of the edge guide projecting upward;

[0019] **FIG. 6** is a top view of the router, adjustable router base, and a straight edge being used to cut a dado in a workpiece in a location that is remote from the edge of the workpiece, particularly illustrating the router base being guided by a slot in the straight edge;

[0020] **FIG. 7** is a side view of the router, adjustable router base, straight edge, and workpiece indicated by lines **7-7** in **FIG. 6**, particularly illustrating the manner in which the edge guide is coupled to the lower member of the adjustable router base in an up position where the protrusion of the edge guide projects downward into the slot of the straight edge;

[0021] **FIG. 8** is a bottom isometric assembly view of the router, adjustable router base, and a radial extension member, particularly illustrating the manner in which the radial extension member can be releasably coupled to the lower member of the adjustable router base; and

[0022] **FIG. 9** is an isometric view of the router, adjustable router base, and radial extension member being used to cut an arcuate dado in a workpiece.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0023] Referring initially to **FIGS. 1 and 2**, an adjustable router base **10** constructed in accordance with one embodiment of the present invention is illustrated as generally comprising an upper member **12**, a lower member **14**, and an edge guide **16**. Upper member **12** is configured to be securely coupled to a conventional router **18**. As perhaps best illustrated in **FIG. 2**, upper member **12** can be constructed with pre-drilled holes which can be aligned with the threaded openings provided in the standard base **20** of router **18**. A plurality of screws can be extended through the openings in upper member **12** and threaded into the openings in standard base **20** to thereby securely fix router **18** to upper member **12**. In certain instances, conventional router **18** is originally equipped with a sub-base (not shown) coupled to the bottom of standard base **20** that must be removed prior to attachment of upper member **12** to standard base **20**. Upper member **12** defines an upper opening **22** which is aligned with the axis of rotation of the bit of router **18** and permits the bit of router **18** to extend therethrough.

[0024] In accordance with one embodiment of the present invention, when router **18** is coupled to upper member **12**, router **18** and upper member **12** can be used independently of lower member **14** and edge guide **16**. When router **18** and upper member **12** are used without lower member **14** and edge guide **16**, upper member **12** simply acts as a replacement for the standard sub-base provided by the manufacturer of router **18**. When it is desired to cut an edge of a workpiece with router **18**, it is preferred for router **18** and upper member **12** to be used independently of lower member **14** and edge guide **16**. However, as discussed in further detail below, when it is desired to use router **18** to cut a groove (e.g., a dado) at a location spaced from the edge of the workpiece, it is preferred for router **18** and upper member **12** to be coupled to and used in conjunction with lower member **14** and edge guide **16**.

[0025] When router **18** and upper member **12** are used in conjunction with lower member **14** and edge guide **16**, upper member **12** is coupled to lower member **14** in a manner that permits shifting of upper member **12** relative to lower member **14** along a substantially linear path, while relative shifting of upper and lower members **12,14** in any direction other than along the substantially linear path is inhibited. Lower member **14** preferably comprises a substantially flat base plate **24**, a pair of laterally-spaced first and second side guides **26***a,b,* and a fine-tuning system **28**. Each side guide **26** is preferably formed of an elongated member having a generally L-shaped cross section. Side guides **26***a,b* are coupled to base plate **24** proximate opposite edges of base plate **24**. Side guides **26***a,b* are coupled to base plate **24** so that each side guide **26** is positioned in a generally upside-down "L" configuration with the projecting legs of the upside-down "L" extending towards one another. In such a configuration, an open channel is defined between each side guide **26** and the upper surface of base plate **24**. The channels defined by side guides **26***a,b* are open towards one another and are configured to receive upper member **12** therebetween. Thus, side guides **26***a,b* coupled upper member **12** to lower member **14** in a manner that permits translation of upper member **12** relative to lower member **14** along a substantially linear path, with the edges of upper member **12** traveling through the channels during relative shifting of upper and lower members **12,14**. Further, side guides **26***a,b* are operable to hold upper member **12** down onto lower member **14** so that a substantially flat upper surface of base plate **24** and a substantially flat lower surface of upper member **12** are maintained in continuous engagement with one another.

[0026] Referring again to **FIGS. 1 and 2**, fine-tuning system **28** can assume a variety of different configurations. As used herein, "fine-tuning system" denotes a mechanism that causes relative movement between upper member **12** and lower member **14** when actuated, and also restrains free movement of the members **12,14** relative to one another during actuation.

[0027] As perhaps best illustrated in **FIG. 1**, in one embodiment of the present invention, fine-tuning system **28** includes an actuating knob **30**, a pinion gear **32**, and a rack gear **34**. Rack gear **34** is formed in or coupled to an edge of upper member **12**. Pinion gear **32** and actuating knob **30** are rotatably coupled to side guide **26***b*. When the edge of upper member **12** is properly received in the channel defined between side guide **26***b* and base plate **24**, rack gear **34** and pinion gear **32** form a mating relationship. Actuating knob **30** and pinion gear **32** are coupled to one another so that rotation of actuating knob **30** causes rotation of pinion gear

32. When actuating knob **30** and pinion gear **32** are rotated, the interaction between pinion gear **32** and rack gear **34** causes upper member **12** to shift relative to lower member **14**. It is preferred for a certain degree of frictional resistance to exist in fine-tuning system **28** and/or between upper and lower members **12,14** in order to somewhat restrain free rotation of actuating knob **30**. This frictional resistance helps secure the position of upper member **12** relative to lower member **14** after a fine-tuned adjustment has been made with fine-tuning system **28**, but before upper member **12** and lower member **14** have been securely locked relative to one another, as will be discussed in further detail below.

[**0028**] Referring again to **FIGS. 1 and 2**, base plate **24** of lower member **14** defines a lower opening **36**. When upper member **12** and lower member **14** are coupled to one another, upper opening **22** of upper member **12** and lower opening **36** of lower member **14** are aligned with one another so that the bit of router **18** can extend through both openings **22,36**. Preferably, lower opening **36** is elongated in the direction of travel of upper member **12** relative to lower member **14** so that upper opening **22** maintains alignment with lower opening **36** when the position of upper member **12** is adjusted relative to lower member **14**.

[**0029**] As shown in **FIG. 2**, a scale **38** can be coupled to, embossed, or engraved in lower member **14**. If scale **38** is formed of a separate member than base plate **24**, it is preferred for scale **38** to be received in a recess formed in the top of base plate **24** so that the upper surface of scale **38** is co-planar with the upper surface of base plate **24**. As shown in **FIG. 2**, a tick mark **40** can be provided on/in upper member **12**. Tick mark **40** is aligned over or adjacent scale **38** when upper member **12** is coupled to lower member **14** with upper opening **22** aligned over lower opening **36**. It is preferred for upper member **12** to be formed of a clear polycarbonate material (e.g., Plexiglass™) so that scale **38** is visible through upper member **12**. Alternatively, upper member **12** can be constructed with an opening/window through which scale **38** can be viewed. In such a configuration, tick mark **40** would be located in the opening/window. In an alternative embodiment, scale **38** could be located on upper member **12**, while tick mark **40** is located on lower member **14**.

[**0030**] As discussed above, the position of upper member **12** relative to lower member **14** can be adjusted using fine-tuning system **28**. Once router base **10** has been adjusted to the desired cutting position, upper member **12** is secured to lower member **14** to prevent shifting when router **18** is used to perform a cut. **FIGS. 1 and 2** illustrate a friction locking mechanism **42** which is operable to increase and decrease the frictional engagement force between the bottom surface of upper member **12** and the upper surface of lower member **14**. In the embodiment illustrated in **FIGS. 1 and 2**, friction locking mechanism **42** includes two rotatable locking knobs, each including a broad unthreaded head portion and a narrow threaded lower portion. The head portions of the locking knobs are disposed above the top surface of upper member **12**, while the threaded lower portions of the locking knobs extend through spaced-apart slots **44** in upper member **12** and are received in threaded openings formed in lower member **14**. When it is desired to lock upper member **12** and lower member **14** to one another, the locking knobs can be rotated in a direction that causes the threaded lower portion to move further into the threaded openings of lower member **14**. This downward movement of the locking knobs forces the bottom of the head portion into the top of upper member **12** adjacent slots **44**. As locking knobs are tightened, the frictional force between the bottom surface of upper member **12** and the top surface of lower member **14** is increased, thereby locking the two members **12,14** to one another. Prior to shifting upper member **12** relative to lower member **14**, locking knobs must be rotated in the opposite direction to reduce the frictional force between upper and lower members **12,14**.

[**0031**] Referring now to **FIGS. 2 and 3**, adjustable router base **10** can also be equipped with first and second stop mechanisms **46***a,b* which cooperate with a projecting lug **48** to thereby limit travel of upper member **12** relative to lower member **14**. In the embodiment illustrated in **FIGS. 2 and 3**, first and second stop mechanisms **46***a,b* are shiftably coupled to first side guide **26***a*, while lug **48** is fixed to and projects upwardly from the top surface of upper member **12**. When upper member **12** is received in lower member **14**, lug **48** is disposed between stop mechanisms **46***a,b*. Stop mechanisms **46***a,b* limit the travel of upper member **12** relative to lower member **14** by engaging lug **48**. Stop mechanisms **46***a,b* include a generally C-shaped hanging body and a threaded locking knob. The positions of stop mechanisms **46***a,b* can be independently adjusted relative to first side guide **26***a* by loosening the threaded locking knobs, sliding stop mechanisms **46***a,b* on first guide member **26***a*, and then retightening the threaded locking knobs.

[**0032**] Referring now to **FIGS. 1, 2, 5**, and **7**, edge guide **16** is shiftably coupled to lower member **14**. Edge guide **16** is shiftable between a down position (illustrated in **FIGS. 1-5**) and an up position (illustrated in **FIGS. 6-9**). When edge guide **16** is in the down position, at least a portion of edge guide **16** extends below the substantially planar lower surface of lower member **14**. However, when edge guide **16** is in the up position, all of edge guide **16** is positioned above the lower surface of lower member **14**.

[**0033**] As perhaps best illustrated in **FIGS. 5 and 7**, edge guide **16** includes a main body **50** and a protrusion **52** extending from main body **50**. Main body **50** presents a guide face **54** and a securement face **56**. When edge guide **16** is in the down position (**FIG. 5**), guide face **54** presents a substantially planar surface that extends below and substantially perpendicular to the substantially planar lower surface of lower member **14**. Further, when edge guide **16** is in the down position (**FIG. 5**), securement face **56** engages the lower surface of lower member **14**. Finally, when edge guide **16** is in the down position (**FIG. 5**), protrusion **52** extends generally upward. When edge guide **16** is in the up position (**FIG. 7**), guide face **54** is located entirely above the lower surface of lower member **14**. Further, when edge guide **16** is in the up position (**FIG. 7**), securement face **56** engages the upper surface of base plate **24** of lower member **14**. Finally, when edge guide **16** is in the up position (**FIG. 7**), protrusion **52** extends generally downward.

[**0034**] A variety of different mechanisms can be employed to permit shifting of edge guide **16** relative to lower member **14** between the up and down positions. For example, edge guide **16** can be coupled to lower member **14** by a locking hinge or locking pivot which permits shifting of edge guide **16** between the up and down positions without completely decoupling edge guide **16** from lower member **14**. However,

in the embodiment illustrated in **FIGS. 1-9**, edge guide **16** is coupled to lower member **15** by a plurality of removable screws **58** (**FIGS. 2, 5**, and **8**) which extend through unthreaded openings in edge guide **16** and into threaded openings in base plate **24** of lower member **14**. The threaded openings in base plate **24** preferably extend entirely through base plate **24** so that the threaded openings can be accessed from the bottom and top of base plate **24**.

[**0035**] In order to shift edge guide **16** from the down position (**FIGS. 1-5**) to the up position (**FIGS. 6-9**), the following steps are performed in sequence: (1) edge guide **16** is decoupled from lower member **14** by unscrewing removable screws **58** (**FIGS. 2 and 5**) from lower member **14**; (2) edge guide **16** is then repositioned so that securement face **56** (**FIG. 7**) engages the top surface of base plate **24** with protrusion **52** pointing downward and the unthreaded openings in edge guide **16** aligned with the threaded openings in base plate **24**; and (3) recoupling edge guide **16** to lower member **14** by extending removable screws **58** (**FIG. 8**) through the unthreaded openings in edge guide **16** and into the threaded openings in base plate **24** of lower member **14**.

[**0036**] In order to shift edge guide **16** from the up position (**FIGS. 6-9**) to the down position (**FIGS. 1-5**), the following steps are performed in sequence: (1) edge guide **16** is decoupled from lower member **14** by unscrewing removable screws **58** (**FIG. 8**) from lower member **14**; (2) edge guide **16** is then repositioned so that securement face **56** (**FIG. 5**) engages the bottom surface of base plate **24** with protrusion **52** pointing upward and the unthreaded openings in edge guide **16** aligned with the threaded openings in base plate **24**; and (3) recoupling edge guide **16** to lower member **14** by extending removable screws **58** (**FIGS. 2 and 5**) through the unthreaded openings in edge guide **16** and into the threaded openings in base plate **24** of lower member **14**.

[**0037**] Referring now to **FIG. 8**, adjustable router base **10** can also comprise at least one elongated radial extension member **60**. Extension member **60** defines a plurality of pivot openings **68** spaced from one another in the direction of elongation of radial extension member **60**. Radial extension member **60** can be releasably coupled to lower member **14** in the manner that permits radial extension member **60** to extend a substantial distance outwardly from lower member **14**. In a preferred embodiment of the present invention, base plate **24** of lower member **14** defines a slot **62** for receiving a proximal end of radial extension member **60**. Extension member **60** can be coupled to lower member **14** by placing the proximal end of extension member **60** into slot **62** and securing the proximal end of extension member **60** in slot **62** with a plurality of removable screws. When radial extension member **60** is coupled to lower member **14**, it is preferred for the substantially planar lower surface **64** presented by lower member **14** to be substantially co-planar with the substantially planar lower surface **66** of extension member **60**.

[**0038**] In one embodiment of the present invention, extension member **60** is the first of several extension members coupled to lower member **14**. The distal end of first extension member **60** defines threaded openings **70**. Threaded openings **70** are configured similar to the threaded openings located in slot **62** of lower member **14**. Thus, threaded openings **70** permit a second radial extension member of substantially the same configuration as first extension member **60** to be coupled to first extension member **60** by attaching the proximal end of the second extension member to the distal end of first extension member **60** and coupling the two extension members to one another by extending screws through openings in the proximal end of the second extension member and into threaded openings **70** of first extension member **60**. Alternatively, multiple radial extension members can be coupled to one another using an additional connector piece (not shown) to couple the distal end of a first extension member to the proximal end of a second extension member. Such connector piece, if employed, is provided with a first set of threaded openings that align with the openings in the distal end of the first extension member and a second set of threaded openings that align with the openings in the proximal end of lthe second extension member. Removable screws can be used to couple the distal end of the first extension member to the connector piece and the proximal end of the second extension member to the connector piece, thereby rigidly coupling the first and second extension members to one another. By using multiple extension members, a radial extension of any desired length can be provided. The radial extension member(s) are preferably configured to extend at least about 12 inches away from the lower member of the router base, more preferably at least about 24 inches away from the lower member of the router base, and most preferably at least 48 inches away from the lower member of the router base.

[**0039**] **FIGS. 3-7** and **9** show router base **10** and router **18** in three distinct modes of operation. **FIGS. 3-5** illustrate a "workpiece-guided mode of operation."**FIGS. 6 and 7** illustrate a "straight edge-guided mode of operation."**FIG. 9** illustrates a "pivot-guided mode of operation." As discussed previously, router base **10** and router **18** can also be used in a fourth "free-hand" mode of operation where upper member **12** of router base **10** is completely decoupled from lower member **14** and upper member **12** is simply employed as the base of router **18**.

[**0040**] The workpiece-guided mode of operation illustrated in **FIGS. 3-5** shows router base **10** and router **18** being employed to cut a dado **72** in a workpiece **74**, while the position of router **18** and router base **10** relative to workpiece **74** is maintained by a guiding edge **76** of workpiece **74**. When router base **10** and router **18** are employed in the workpiece-guided mode of operation, edge guide **16** is in the down position so that guide face **54** (**FIG. 5**) maintains contact with guiding edge **76** of workpiece **74** during cutting of dado **72**. The workpiece-guided mode of operation is typically employed when it is desired to cut a dado near the edge of a workpiece. When it is desired to cut a dado in a location spaced a substantial distance from the edge of a workpiece, the straight edge-guided mode of operation illustrated in **FIGS. 6 and 7** can be employed.

[**0041**] The straight edge-guided mode of operation illustrated in **FIGS. 6 and 7** shows router base **10** and router **18** being employed to cut a dado **78** in a workpiece **80**, while the position of router **18** and router base **10** relative to workpiece **80** is maintained by an elongated straight edge **82** which is rigidly coupled to workpiece **80** by at least one clamp **84**. Straight edge **82** preferably defines at least one slot **86** presenting an upper open end. When router base **10** and router **18** are employed in the straight edge-guided mode of operation, edge guide **16** is in the up position with

protrusion **52** extending downward into slot **86** (**FIG. 7**). When protrusion **52** is received in slot **86**, protrusion **52** can travel through slot **86** in the direction of elongation of straight edge **82**; however, shifting of protrusion **52** in slot **86** in a direction perpendicular to the direction of elongation of straight edge **52** is inhibited.

[**0042**] One way to ensure that edge guide **16** does not rotate in slot **86** is to configure protrusion **52** to extend a substantial distance along the length of slot **86**. In the illustrated embodiment, protrusion **52** is a single elongated element that is received in slot **86**. In an alternative embodiment, protrusion **52** can be formed by a plurality of separate protrusions. However, in either configuration, it is desirable for protrusion **52** to include a first end portion/member that is space from a second end portion/member by at least about 2 inches, measured in the direction of elongation of slot **86** when protrusion **52** is received in slot **86**. More preferably, the first and second end portions/members of protrusion **52** are spaced from each other by at least about 4 inches, and most preferably at least 6 inches. Thus, protrusion **52** travels linearly through slot **86** without permitting rotation of edge guide **16** relative to straight edge **82** when router **18** is employed to cut dado **78** in workpiece **80**.

[**0043**] As shown in **FIG. 9**, the pivot-guided mode of operation can be employed to cut an arcuate dado **88** in a workpiece **90**. In the pivot-guided mode of operation, the proximal end of radial extension member **60** is coupled to lower member **14** of router base **10** and one of the pivot openings **68** is coupled to workpiece **90** by a pivot element **92**. Pivot element **92** can simply be a screw or nail which extends through a pivot opening **68** of extension member **60** and is coupled to workpiece **90**. The radius of curvature of arcuate dado **88** can be adjusted by selecting which pivot opening **68** through which to extend pivot element **92**. If it is desired to cut arcuate dado **88** with a large radius of curvature, multiple intercoupled extension members **60** can be employed, as previously discussed.

[**0044**] In each of the three modes of operation described immediately above, a rigid "guide element" is used to guide the location and/or configuration of the cut. In the workpiece-guided mode of operation (**FIGS. 3-5**) the "guide element" is guiding edge **76** of workpiece **74**. In the straight edge-guided mode of operation (**FIGS. 6 and 7**), the "guide element" is defined by slot **86** of straight edge **82**, which is rigidly coupled to workpiece **80** during cutting of dado **78**. In the pivot-guided mode of operation (**FIG. 9**), the "guide element" is pivot element **92**, which is rigidly coupled to workpiece **90** during cutting of arcuate dado **88**.

[**0045**] In the three modes of operation described above with reference to **FIGS. 3-9**, adjustable router base **10** provides a number of common useful features. For example, router base **10** permits multiple cuts to be made at different distances from the guide element by shifting upper member **12** relative to lower member **14** with fine-tuning mechanism **28**. These multiple cuts/passes can form separate grooves, or can be used to form a single groove having a width greater than the width of the router bit. When the guide element is a straight edge, the straight edge does not need to be reset (i.e., clamped to the workpiece at a different location) each time a new cut/pass is performed. Further, when the guide element is a pivot element used to create an arcuate dado, the pivot element does not need to be reset each time a new cut/pass is performed.

[**0046**] Another useful feature of adjustable router base **10** is the travel-limiting system formed by adjustable stops **46***a,b* and lug **48**. This travel-limiting system allows the location and width of cuts/passes to be fixed so that an identical groove can be formed in multiple workpieces without having to re-measure for each workpiece. In addition, if it desired to change router bits during the middle of a cut (e.g., to transition to a different sized bit), the travel-limiting system can allow the router to be removed and returned to exactly the same position relative to the guide element without having to re-measure.

[**0047**] The preferred forms of the invention described above are to be used as illustration only, and should not be utilized in a limiting sense in interpreting the scope of the present invention. Obvious modifications to the exemplary embodiments and modes of operation, as set forth herein, could be readily made by those skilled in the art without departing from the spirit of the present invention.

[**0048**] The inventor hereby states his intent to rely on the Doctrine of Equivalents to determine and assess the reasonably fair scope of the present invention as pertains to any apparatus not materially departing from but outside the literal scope of the invention as set forth in the following claims.

What is claimed is:

1. An adjustable router base comprising:

a normally-lower member presenting a substantially planar lower surface;

a normally-upper member coupled to said normally-lower member and shiftable relative to said normally-lower member; and

an edge guide coupled to said normally-lower member and shiftable between a down position and an up position,

at least a portion of said edge guide extending below said substantially planar lower surface when in said down position,

said edge guide being positioned entirely above said substantially planar lower surface when in said up position.

2. The adjustable router base of claim 1,

said edge guide presenting a substantially planar guide face extending below said lower member when said edge guide is in said down position,

said substantially planar guide face extending substantially perpendicular to said substantially planar lower surface when said edge guide is in said down position.

3. The adjustable router base of claim 1,

said edge guide including a main body and a protrusion extending from said main body,

said protrusion projecting generally downward when said guide member is in said up position,

said protrusion projecting generally upward when said guide member is in said down position.

4. The adjustable router base of claim 1; and

a fine-tuning system for selectively shifting said normally-upper member relative to said normally-lower member when said fine-tuning system is actuated.

5. The adjustable router base of claim 4,

said fine-tuning a system comprising an actuating knob that rotates when said fine-tuning system is actuated.

6. The adjustable router base of claim 5,

said fine-tuning system further comprising a first gear mechanism coupled to said normally-upper member and a second gear mechanism coupled to said normally-lower member,

said actuating knob being coupled to said first gear mechanism so that rotation of said actuating knob causes rotation of said first gear mechanism.

7. The adjustable router base of claim 6,

said first gear mechanism being a rack gear,

said second gear mechanism being a pinion gear.

8. The adjustable router base of claim 1; and

a scale for indicating the location of said normally-upper member relative to said normally-lower member.

9. The adjustable router base of claim 1; and

a projecting lug fixed relative to said normally-upper member; and

a first adjustable stop mechanism shiftably coupled to said normally-lower member,

said lug and said first adjustable stop mechanism being configured to engage one another to thereby limit the travel of said normally-upper member relative to said normally-lower member in a first direction.

10. The adjustable router base of claim 9; and

a second adjustable stop mechanism shiftably coupled to said normally-lower member,

said lug and said second adjustable stop mechanism being configured to engage one another to thereby limit the travel of said normally-upper member relative to said normally-lower member in a second direction opposite said first direction,

said first and second stop mechanisms being shiftable relative to said normally-lower member in said first and second directions.

11. The adjustable router base of claim 1,

said normally-lower and normally-upper members being slidably intercoupled so as to permit relative translation of said normally-lower and normally-upper members only along a single substantially linear path.

12. The adjustable router base of claim 11,

said normally-upper member defining an upper opening,

said normally-lower member defining a lower opening,

said lower opening being elongated along said substantially linear path relative to said upper opening so that at least a portion of said lower opening remains substantially aligned with at least a portion of said upper opening during shifting of said normally-upper member relative to said normally-lower member.

13. The adjustable router base of claim 1,

said normally-upper member presenting a substantially planar bottom surface,

said normally-lower member presenting a substantially planar upper surface,

said bottom surface and said upper surface engaging one another.

14. The adjustable router base of claim 13,

said normally-lower member including a pair of spaced-apart side guides receiving at least a portion of said normally-upper member therebetween,

said side guides being configured to permit relative translation of said normally-upper and normally-lower members along a first line of travel while inhibiting relative translation of said normally-upper and normally-lower members along a second line of travel transverse to said first line of travel,

said side guides being configured to maintain contact between said bottom surface of said normally-upper member and said upper surface of said normally-lower member.

15. The adjustable router base of claim 14; and

a friction locking mechanism operable to selectively increase and decrease the frictional force between said bottom surface of said normally-upper member and said upper surface of said normally-lower member, thereby selectively locking and unlocking said normally-upper member and said normally-lower member relative to one another.

16. The adjustable router base of claim 1; and

a radial extension member releasably coupled to said normally-lower member and extending at least about 12 inches outwardly from said normally-lower member.

17. The adjustable router base of claim 1,

said normally-upper member being completely detachable from and reattachable to said normally-lower member,

said normally-upper member presenting a substantially planar bottom surface.

18. An adjustable router base suitable for use in conjunction with a router and a straight edge, said straight edge having an elongated slot formed therein, said elongated slot presenting an open upper end, said adjustable router base comprising:

a normally-lower member presenting a substantially planar lower surface;

a normally-upper member configured for rigid attachment to said router, said normally upper member being shiftably coupled to said normally-lower member; and

a protrusion fixed relative to said normally-lower member and extending in a generally downward direction,

said protrusion being configured for receipt in said elongated slot of said straight edge so as to permit travel of said protrusion through said elongated slot in the direction of elongation of said slot while inhibiting shifting

of said protrusion in said slot in a direction perpendicular to the direction of elongation of said slot.

19. The adjustable router base of claim 18; and

an edge guide coupled to said normally-lower member and comprising said protrusion.

20. The adjustable router base of claim 19,

said edge guide including a main body secured to said normally-lower member,

said protrusion projecting from said main body,

said protrusion being spaced from said normally-lower member.

21. The adjustable router base of claim 19,

said edge guide being shiftable relative to said normally-lower member between a down position and an up position,

said protrusion projecting generally upward when said guide member is in said down position,

said protrusion projecting generally downward when said guide member is in said up position.

22. The adjustable router base of claim 18,

said protrusion including two end portions spaced from one another by at least about 2 inches.

23. The adjustable router base of claim 18,

said normally-lower and normally-upper members being slidably intercoupled in a manner that permits relative translation of said normally-lower and normally-upper members only along a single substantially linear path.

24. The adjustable router base of claim 23; and

a fine-tuning system for selectively shifting said normally-upper member relative to said normally-lower member along said substantially linear path when said fine-tuning system is actuated,

said fine-tuning system comprising an actuating knob that rotates when said fine-tuning system is actuated.

25. The adjustable router base of claim 24,

said fine-tuning system further comprising a first gear mechanism coupled to said normally-upper member and a second gear mechanism coupled to said normally-lower member,

said first gear mechanism being a rack gear,

said second gear mechanism being a pinion gear.

26. The adjustable router base of claim 24; and

a scale for indicating the location of said normally-upper member relative to said normally-lower member.

27. The adjustable router base of claim 23,

said normally-lower member including a pair of spaced-apart side guides receiving at least a portion of said normally-upper member therebetween,

said side guides coupling said normally-upper member and said normally-lower member to one another.

28. The adjustable router base of claim 27,

said side guides being configured to permit relative translation of said normally-upper and normally-lower members along said single substantially linear path while inhibiting relative translation of said normally-upper and normally-lower members in any other direction.

29. The adjustable router base of claim 18; and

a friction locking mechanism for selectively fixing the positions of said normally-upper member and said normally-lower member relative to one another.

30. A method of operating a router coupled to an adjustable router base,

said router base comprising a normally-lower member, a normally-upper member, and an edge guide coupled to said normally-lower member, said router being rigidly coupled to said normally-upper member, said method comprising the steps of:

(a) placing at least a portion of said guide member in contact with a guiding edge;

(b) using said router to make an elongated first cut in a workpiece while maintaining contact between said guide member and said guiding edge;

(c) shifting said normally-upper member relative to said normally-lower member;

(d) using said router to make an elongated second cut in said workpiece while maintaining contact between said guide member and said guiding edge, said first and second cuts being located different distances from said guiding edge;

(e) decoupling said normally-upper member from said normally-lower member; and

(f) while said normally-upper member is decoupled from said normally-lower member, using said router to make a third cut in the same workpiece or a different workpiece.

31. The method of claim 30,

said guiding edge being presented by said workpiece.

32. The method of claim 30,

said guiding edge being presented by a straight edge rigidly coupled relative to said workpiece.

33. The method of claim 32,

said guiding edge defining at least a portion of an elongated slot in said straight edge,

step (a) including inserting a protrusion of said guide member into said elongated slot,

steps (b) and (d) including causing said protrusion to travel through said elongated slot.

34. The method of claim 32,

steps (b) and (d) being performed while said straight edge is coupled to said workpiece in the same position.

35. The method of claim 30,

step (c) including actuating a fine-tuning system that causes shifting of said normally-upper and normally-lower members relative to one another.

36. The method of claim 35,

said actuating including rotating an actuating knob of said fine-tuning system.

37. The method of claim 30,

said method including disengaging a locking mechanism prior to step (c) and reengaging said locking mechanism subsequent to step (c),

said locking mechanism inhibiting relative shifting of said normally-upper and normally-lower members relative to one another when engaged,

said locking mechanism permitting relative shifting of said normally-upper and normally-lower members relative to one another when disengaged,

said locking mechanism being disengaged during step (c) and engaged during steps (b) and (d).

* * * * *